



Introduction to: NMFS's Multi-Species Pile Driving Calculator Tool

Version 1.0, 2021



Welcome to an Introduction to NMFS's Multispecies Pile Driving Calculator. This PowerPoint is designed to be a basic tutorial on how to use this optional Tool. You may advance through these slides at your own pace.



Before you get started:



NOTE: Different Regions may have different requirements, please check with the appropriate Regional/HQ staff before using this tool.

1. This Tool was primarily designed for coastal pile driving activities
2. Please read Instructions Tab
3. Use of this Tool is optional
4. Make sure you are using the most recent version of Tool

NOTE: This optional tool provides a means to estimate distances associated with various NMFS thresholds (i.e., interim, as well as more formalized) Mitigation and monitoring requirements associated with a Marine Mammal Protection Act (MMPA) authorization or an Endangered Species Act (ESA) consultation or permit are independent management decisions made in the context of the proposed activity and comprehensive effects analysis, and are beyond the scope of this Calculator

Before you start, there are a few items of note, including that different Regions may have different requirements, please check with the appropriate Regional/HQ staff before using this tool. 1) This Tool was primarily designed for coastal pile driving activities, 2) Reading the Instruction Tab is recommended, and 3) Use of this Tool is optional. If you have more accurate means of estimating isopleths, please do so. Finally, this Tool provides a means to estimate distances associated with various NMFS thresholds. Mitigation and monitoring requirements associated with a MMPA or an ESA consultation or permit are independent management decisions made in the context of the proposed activity and comprehensive effects analysis, and are beyond the scope of this Tool.



Basic Information Needs



Type of pile driving: Impact/Vibratory



Proxy sound levels: If unknown, see Proxy Level Tabs

- Note distance associated with Level (if not 10 m, then change in Calculator Tab)



Transmission loss: Default is 15



Number of piles per day




Strikes per pile (impact)/Duration to drive pile (vibratory)



Attenuation?: 5 dB default

There are some basic pieces of information needed to use this Tool. First, one must know what type of pile driving activity they are doing, either impact or vibratory. Proxy sound levels are also needed, but if unknown, NMFS provides help by the Tool having a Tab with surrogate levels. Note: Most proxy levels are specified at 10 m from the pile. If this distance is different from 10 m, this needs to be changed in the Calculator Tab. Transmission loss is needed, but NMFS provides help via a default value of 15 (practical spreading), if unknown. This default may be changed if transmission loss data are available. One must know the number of piles per day and either strikes per pile for impact pile driving or duration (minutes) to drive a pile using vibratory pile driving. NMFS suggests using a best estimate based on previous experience. If a bubble curtain or other attenuation device is being used, NMFS provides help via recommending a -5 dB default, unless better information is available

Instruction Tab



There are eight Tabs in this tool. Let's start with the Instruction Tab, which you can access using the toolbar found at the bottom of the Tool.



Instructions Tab

INSTRUCTIONS

1. Tabs are organized by Pile Driving Type:

IMPACT

VIBRATORY

2. Within each Tab results are organized by Species:

FISHES

SEA TURTLES

MARINE MAMMALS

3. Within the appropriate Tab, users fill-in:

GREEN CELLS

When completing GREEN cells, please include all assumptions made.

4. Estimated isopleths (meters) will be provided via:

BRIGHT BLUE CELLS

NOTE: Assumptions within this Tab

The Instruction Tab provides instructions and a general overview of other tabs within the Tool. Tabs are organized by pile driving type: either impact (red) or vibratory (gray). Within each Tab, results are organized by species (fishes, sea turtles, or marine mammals). Within each Tab, the user provides information via green cells with output (isopleths in meters) provided in bright blue cells. Additionally in this Tab, note the various Assumptions listed. This Tab also includes a Contact for technical questions or suggestions, proxy sound level references, and threshold references.

Acronym Tab



INSTRUCTIONS (PLEASE READ!)

ACRONYMS

IMPACT PROXY SOUND LEVELS

IMPACT CALCUL



NOAA
FISHERIES

The Acronym Tab can be accessed using the toolbar found at the bottom of the Tool.



NOAA
FISHERIES

Acronym Tab

A	B	C	D	E	F
ACRONYMS					
FHWG	Fisheries Hydroacoustic Working Group				
g	grams				
h	hour				
HF	high-frequency cetacean				
LF	low-frequency cetacean				
m	meters				
MF	mid-frequency cetacean				
MM	marine mammals				
MMPA	Marine Mammal Protection Act				
NMFS	National Marine Fisheries Service				
NOAA	National Oceanic and Atmospheric Administration				
PK	peak sound pressure level				
PTS	permanent threshold shift				
PW	phocid pinniped (underwater)				
OW	otariid pinniped (underwater)				
RMS	root-mean-square sound pressure level				
SEL	sound exposure level				

For definitions of common terms in this Tool see:

[https://media.fisheries.noaa.gov/dam-migration/tech_memo_acoustic_guidance_\(20\)_pdf_508.pdf](https://media.fisheries.noaa.gov/dam-migration/tech_memo_acoustic_guidance_(20)_pdf_508.pdf)

The Acronym Tab provides various acronyms used throughout the Tool. It also provides a link to definitions of common terms used in the Tool.

Test Drive/Demo: Updated Tool




Examples:

A. Impact pile driving

- 36" steel pipe, 3 piles, 1000 strikes/pile, with bubble curtain

B. Vibratory pile driving

- 36" steel pipe, 3 piles, 30 minutes

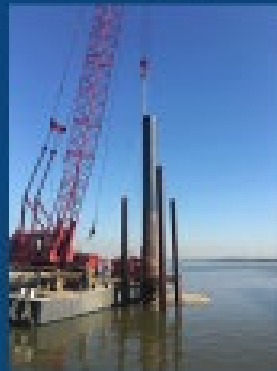

NOAA
FISHERIES

Today, we will be walking through two examples, starting with an impact pile driving example (36" steel pipe piles, 3 piles per day, 1000 strikes/pile, with a bubble curtain).



NOAA
FISHERIES

Proxy Sound Level Tab: Impact



Let's demonstrate the Proxy Sound Level Tab for impact pile driving. Again, this Tab can be accessed using the toolbar found at the bottom of the Tool.



Proxy Sound Level Tab: Impact



1. Tab is sortable
2. Note: Pile size, Material, Water depth, & Comments
3. If exact pile size/material is not listed: Consult NMFS or use next largest size
4. Copy from Tab & then paste directly in Calculator Tab (paste as Value 123)

NOTE: Measurement Distance from Pile if not 10 m, then value will need to be updated in Calculator Tab



Note the various assumptions listed at the top of this Tab. This Tab is sortable by various pile features (size, material, etc.). Note the complete row of information provided for each pile, including water depth, location, reference, and comments. Please pick the proxy that is most applicable to your activity. If the exact pile size or material is not listed, consult NMFS or use next largest size. Copy the information from this Tab and then paste directly in the corresponding Calculator Tab (paste as a Value, 123). Note: If the measurement distance from the pile is not 10 m, then this value will need to be updated in Calculator Tab. If you have specific information on sound levels for your pile size/material, then it is not necessary to rely on a proxy.



Proxy Sound Level Tab: Impact

To use this Tab, it makes sense to sort data by appropriate pile size and pile material.

IMPACT PILE DRIVING PROXY SOUND LEVELS (UNATTENUATED)

How to Use Proxy Levels (NOTE: Data can be sorted)

- 1) When selecting the appropriate proxy levels, be sure to take into account the Pile size, Pile material, Water depth (off installation), and the Comments column (if more information is needed, NMFS suggest see
- 2) If the exact pile material is not here, consult NMFS and use the next largest size pile of the same material for a conservative estimate.
- 3) To approximate proxy levels for impact pile driving only (not appropriate for vibratory pile driving), there Peak subtask 15 dB for RMS, 25 dB for SEL, NMFS has provided these approximated values in this T
- 4) To use summary level, Copy from this Tab and then Paste in Calculator (ONLY paste as a Value (123), not formulas. **NOTE** Pay attention to Column E (measurement distance from pile). If it is not 10-m, pile
- 5) If there is the possibility of a project using multiple piles of varying sizes, material, etc., use the specifications that result in the largest isopleths (i.e., impact, largest size, steel pile)

* If multiple distances were provided, only the closest distance is included in this Table

MP: Data not provided

Pile Size (inches)	Pile Material	Hammer Type	Water Depth	Measurement Distance from Pile*	Peak (dB)	SEL ₁₀ (dB)	RMS (dB)	Reference	Project/Location
16" square	concrete	Impact	2-3 m	10 m	183	160	157	Caltrans 2020	Noyo Harbor Mooring Buo Dock Project/Fort Bragg, Noyo Harbor
16" square	concrete	Impact	10 m	10 m	184	163	170	Caltrans 2020	Pier 2, Concord NWBC/Concord, CA - Concord Struts

ACRONYMS IMPACT PROXY SOUND LEVELS IMPACT CALCULATOR IMPACT REPORT VIEW




**NOAA
FISHERIES**

To use the Proxy Sound Level Tab, it makes sense to sort data by appropriate pile size (hot pink arrow) and pile material (turquoise arrow).




**NOAA
FISHERIES**

Proxy Sound Level Tab: Impact

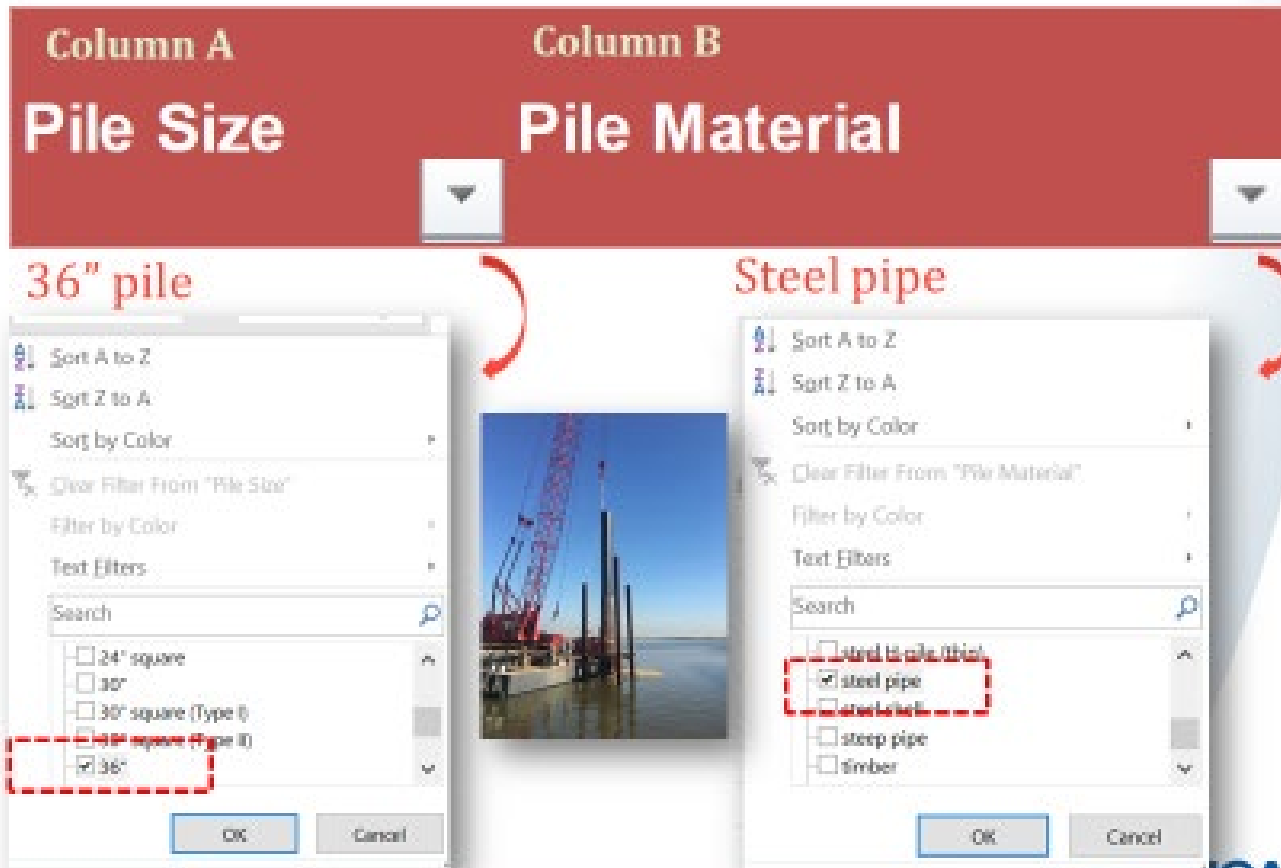

Here is a closer look at sorting columns, specifically Column A for pile size and Column B for pile material. In this example, we are interested in available data for 36" steel pipe piles.

Proxy Sound Level Tab: Impact Results of Sort



Pile Size	Pile Material	Hammer Type	Water Depth	Measurement Distance from Pile*	Peak	SEL _{ss}	RMS	Reference
36"	steel pipe	Impact	10 m	10 m	210	183	193	Caltrans 2015
36"	steel pipe	Impact	<6 m	10 m	208	180	190	Caltrans 2016
36"	steel pipe	Impact	NA	10 m	210	183	193	Caltrans 2020

1. Red box indicates proxy sound levels for 36" steel pipe pile
2. Check water depth & other factors (location, notes)
3. For this example: All three choices are generic examples (no specified location)
4. Will choose 3rd row choice, since depth unknown
 - Copy values of all 3 metrics (Peak, SEL_{ss}, & RMS) for this row



Once data are sorted (by pile size and material), three potential choices for proxy levels are provided (see red box). To choose the most appropriate of the three, check water depth and other factors, such as location, notes, etc. to decide which most closely resembles your situation. For this example, all three choices are generic examples (no specified location). Since for this example, water depth is unknown, we will choose the 3rd row as the most appropriate proxy level. Once chosen, copy values in all three metrics (Peak, SEL_{ss}, and RMS) for this proxy. Note: Pay attention to the measurement distance from the pile if it is anything other than 10 m.



Calculator Tab: Impact



Let's take a look at the Calculator Tab for impact pile driving. This Tab can be accessed using the toolbar found at the bottom of the Tool.



Calculator Tab: Impact

KEY

User Provided Information *Default values are in bold, italics turquoise (can be changed by user if project-specific information is available).*

Preset NMFS Provided Information (cannot be altered by user). **NMFS thresholds/default weighting value are in bold red.**

OUTPUT: Resultant Isopleth (cannot be altered by user)

Automatically Calculated Values Based on User Provided Information (only weighting adjustment (-dB) can be altered by user)



This slide illustrates the Key at the top of the Calculator Tab. Green cells are for user provided information. Note that default values are in bold italics turquoise font. These default values may be changed by the user if project-specific information is available. Yellow cells represent preset NMFS provided information and cannot be altered by the user. NMFS thresholds/default weighting values are in bold red. Bright blue cells represent outputs of the Tool or resultant isopleths based on user provided information and cannot be altered by the user. Finally, gray cells represent automatically calculated values based on user provided information (only weighting adjustment (-dB) values can be altered by the user and are found in the last row of the Tool). Please see Advanced Features later in this presentation for more information on adjusting these values.

Calculator Tab: Impact

A	B	C	D	E
	Automatically Calculated Values Based on User Provided Information (only using the information in the previous section)			
STEP 1: GENERAL PROJECT INFORMATION				
PROJECT TITLE and CONTACT	Example title			
PROJECT/SOURCE INFORMATION (size, material, number, pile strikes, etc.)				Notes (Please include all other information)
STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION				
	METRICS			
	Peak	SELEX	RMS	
Unweighted single strike level (SE) (see Peak Level Tab for example values; GPR, GPRF, P-wave, etc.)				Ed
Attenuated single strike level (SE) (see calculation tab for example)	0	0	0	
Corrected (corrected with single strike level (meters): typically, 10 m but please double check data)	10	10	10	
Transmission loss constant (RMS recommended 15 dB values)	15			
Number of piles per dig (short estimate based on previous experience)		Attenuation amount (e.g., bubble counts) (enter positive number)	0	
Number of strikes per pile (short estimate based on previous experience)			RMS recommended 5 dB or 4 strikes, 8 attenuation constant	

Step 1

Step 2




This slide illustrates the first two steps of the Impact Calculator Tab. Step 1 outlined in hot pink, where a user will enter qualitative project-specific information and Step 2 outlined in turquoise, where the user will enter quantitative project-specific information. We will go into more detail on both these steps in the next slides.



Calculator Tab: Impact

Step 1: General Project Information



STEP 1: GENERAL PROJECT INFORMATION			
PROJECT TITLE and CONTACT	Example title		
PROJECT/SOURCE INFORMATION (size, type, number, pile strikes, etc.)			Notes: (Please include all assumptions) other information

NOTE: Please include any assumptions, including if relying upon proxy sound levels.



Step 1 in the Calculator Tab is where the user provides general project information, such as project title and contact; source information such as pile size material, strikes per pile; and any other assumptions or notes, including if proxy levels were used or if any type of attenuation is assumed.



Calculator Tab: Impact

Step 2: Quantitative Project-Specific Information

STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION			
	METRICS		
	Peak	SELs	RMS
Unattenuated Single strike level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)			
Attenuated Single strike level (dB)* (calculation done automatically)	0	0	0
Distance associated with single strike level (meters); Typically, 10-m but please double check data being used	10	10	10
Transmission loss constant (NMF 5 recommends: 15 if unknown)	15		
Number of piles per day (best estimate based on previous experience)		Attenuation assumed (e.g., bubble curtain) (enter positive number)	0
Number of strikes per pile (best estimate based on previous experience)			NMFS recommends 5 dB as default, if attenuation used
Number of strikes per day	0		
Cumulative SEL at measured distance	#N/A		

NOTE: Default values already included in *italic turquoise* (can be changed)

Step 2 is where quantitative project-specific information is entered, such as levels, distance associated with level, transmission loss, number of piles per day, number of strikes per pile, and attenuation assumed. Default values (italics, turquoise) are provided for distance associated with level and transmission loss. Please confirm these defaults are applicable. If not, they may be modified. Gray cells represent automatically calculated values based on user provided information (and cannot be changed in Step 2). The next slides go into more detail on Step 2 inputs.

Calculator Tab: Impact

Step 2: Quantitative Project-Specific Information

	METRICS		
	Peak	SEL _{ss}	RMS
A Unattenuated Single strike level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)			
B Distance associated with single strike level (meters); Typically, 10-m but please double check data being used	10	10	10
C Transmission loss constant (NMF S recommends: 15 if unknown)	15		

In this row insert proxy sound levels
(**Paste as Value 123**)
OR enter project-specific data



This row has a default value of 10 m. Make sure values in A are associated with 10 m

This row has a default value of 15 (can be changed)



NOAA
FISHERIES

Let's take a closer look at some of the specific cells in Step 2 (labeled by row letter). Row A represents the unattenuated levels in three various metrics (Peak, SEL_{ss}, and RMS). Here a user may enter project-specific levels, if available or enter surrogate levels from the Proxy Level Tab. If values are copied from the Proxy Level Tab, paste them in Row A as a value (see red arrow). Row B represents the distance associated with the previously entered levels. The default value is 10-m, but one should ensure this is correct. This value may be changed if the default is not correct. Row C represents transmission loss. The default value is 15 and is recommended if this value is unknown. If site-specific transmission loss is available, it may be used here instead of the default.



NOAA
FISHERIES

Calculator Tab: Impact

Step 2: Quantitative Project-Specific Information

D	Number of piles per day (best estimate based on previous experience)		Attenuation assumed (e.g., bubble curtain) (enter positive number)	0	F
E	Number of strikes per pile (best estimate based on previous experience)			NMFS recommends 5 dB as default, if attenuation used	

This cell for the number of piles per day

This cell is for the number of strikes per pile

This cell is for attenuation (recommended default 5 but can be changed). If no attenuation leave as zero.

	Peak	SELss	RMS
Unattenuated Single strike level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)			
Attenuated Single strike level (dB)* (calculation done automatically)	0	0	0

Two additional rows are in Step 2. Cell D represents the number of piles per day based on best estimate from previous experience. Cell F represents attenuation, if being used. If it is unclear the appropriate decibel reduction associated with the attenuation method used, NMFS recommends a default of 5 dB. Please only enter positive numbers in this cell. If nothing is being used, please leave value as zero. Whatever attenuation is used will be reflected automatically in the attenuated levels (subtracted off levels entered on previous slide), as shown in the gray cells being illustrated by the red arrow. This will be illustrated further in the next slide. Finally, Cell E represents the number of strikes per pile based on best estimate from previous experience.

Calculator Tab: Impact

Step 2: Quantitative Project-Specific Information

	METRICS		
	Peak	SEL55	RMS
Unattenuated Single strike level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)	210	183	193
Attenuated Single strike level (dB)* (calculation done automatically)	205	178	188
Distance associated with single strike level (meters): Typically, 10-m but please double check data being used	10	10	10
Transmission loss constant (NMFS recommends: 15 if unknown)	15		
Number of piles per day (best estimate based on previous experience)		Attenuation assumed (e.g., bubble curtain) (enter positive number)	5

This cell is automatically subtracts 5 dB off previously entered sound levels (gray row).

NOTE: Always enter positive number for attenuation



This illustrates all the green cells in Step 2. In this example, a bubble curtain is being used but attenuation is unknown. Thus, the NMFS suggested default value of 5 dB is being used (red circle; always enter a positive number). This attenuation is automatically subtracted from the unattenuated values entered previously, as illustrated in the gray cells. These attenuated values are used for calculating resulting isopleths, which will be illustrated next.



Calculator Tab: Impact

Step 2: Quantitative Project-Specific Information

Fully entered values

STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION		METRICS	
	Peak	SELss	RMS
Unattenuated Single strike level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)	210	183	193
Attenuated Single strike level (dB)* (calculation done automatically)	205	178	188
Distance associated with single strike level (meters); Typically, 10-m but please double check data being used	10	10	10
Transmission loss constant (NMFS recommends: 15 if unknown)	15		
Number of piles per day (best estimate based on previous experience)	3	Attenuation assumed (e.g., bubble curtain) (enter positive number)	5
Number of strikes per pile (best estimate based on previous experience)	1000		NMFS recommends 5 dB as default, if attenuation used
Number of strikes per day	3000		
Cumulative SEL at measured distance	213		



This slide illustrates all the values entered in Step 2 for our specific example.



Calculator Tab: Impact

Resultant IsoPLETHS ¹		Tapestry results for each of the five distance ranges (DL, 100).	
Fisheries		Distance (meters) to threshold	
	ONSET OF PHYSICAL HURR	BEHAVIOR	
	Peak (PFI)	SEL... Threshold (DB)	SEL
	Threshold (DB)	Peak (PFI)	Peak (PFI)
	SEL	SEL	SEL
	0	SEL	SEL

¹ This schedule accounts for single adults SEL < 154 dB and schedules for group injury (SEL values > 154)

SEA TURTLES		Distance (meters) to threshold	
PTS ONSET		BEHAVIOR	
Peak (PFI) Threshold (DB)	SEL... Threshold (DB)	SEL Threshold (DB)	
SEL	SEL	SEL	
0	00	00	

MARINE MAMMALS		Distance (meters) to threshold	
Hearing Group		PTS ONSET	
LF Cetacean PTS Peak	MF Cetacean PTS Peak	HF Cetacean PTS Peak	FW Pinniped PTS Peak
SEL Threshold (DB)	SEL Threshold (DB)	SEL Threshold (DB)	SEL Threshold (DB)
SEL	SEL	SEL	SEL
0	0	10	0
LF Cetacean PTS SEL... Threshold (DB)	MF Cetacean PTS SEL Threshold (DB)	HF Cetacean PTS SEL Threshold (DB)	FW Pinniped PTS SEL Threshold (DB)
SEL	SEL	SEL	SEL
SEL	00	1,000	00

BEHAVIOR	
SEL Threshold (DB)	
SEL	
PTS	

MARINE MAMMAL HEARING GROUP	
Low-frequency (LF) cetaceans: baleen whales	
Mid-frequency (MF) cetaceans: dolphins, beaked whales, humpback whales, bottlenose whales	
High-frequency (HF) cetaceans: true porpoises, right, sperm dolphins, cephalyorhynchids, longmanchees, megal to 1, actually	
Pinniped pinnipeds (PW) true seals	
Striped pinnipeds (SP) are least and fur seals	


After quantitative project-specific information is entered in Step 2 of the Calculator, resultant isopleths (bright blue cells) are produced by taxa.





Calculator Tab: Impact

Resultant Isopleths (by taxa) cont'd



*Impulsive sounds have dual metric thresholds for injury (SEL_{cont} & PK)
Metric producing largest isopleth should be used.


MARINE MAMMALS	Distance (meters) to threshold				
Hearing Group	PTS ON SET				
	LF Cetacean PTS Peak (PK) Threshold (dB)	MF Cetacean Peak (PK) Threshold (dB)	HF Cetacean PTS Peak (PK) Threshold (dB)	PW Pinniped PTS Peak (PK) Threshold (dB)	OW Pinniped PTS Peak (PK) Threshold (dB)
	219	230	202	218	232
	1	0	95	1	0
	LF Cetacean PTS SEL _{cont} Threshold (dB)	MF Cetacean PTS SEL _{cont} Threshold (dB)	HF Cetacean PTS SEL _{cont} Threshold (dB)	PW Pinniped PTS SEL _{cont} Threshold (dB)	OW Pinniped PTS SEL _{cont} Threshold (dB)
ALL MARINE MAMMALS	183	185	155	185	202
	954	34	1,148	516	35
	BEHAVIOR				
	RMS Threshold (dB)				
	160				
	730				



This slide illustrates the Resultant Isopleths (bright blue cells) for marine mammals based on the various hearing group-specific acoustic thresholds.



Report Tab: Impact




Let's demonstrate the Impact pile driving Report Tab. This Tab can be accessed using the toolbar found at the bottom of the Tool.



Report Tab: Impact

Summarizes user inputs and resulting isopleths



IMPACT FILE DRIVING REPORT PRINT IN LANDSCAPE TO CAPTURE ENTIRE SCREEN
(If OTHER INFO or NOTES get cut off, please include information elsewhere)

Example title:

PROJECT INFORMATION	PEAK	SEL _{max}	RMS	OTHER INFO
Attenuated Single strike level (dB)	205	178	152	
Distance associated with single strike level (meters)	10	10	10	
Transmission loss constant	15			
Number of piles per day	3			
Number of strikes per pile	1000			
Number of strikes per day	3000			NOTES:
Cumulative M.L. at measured distance	213			Attenuation:

RESULTANT ISOPLETHS

SEALS

ISOPLETHS (meters)	ONSET OF PHYSICAL INJURY		BEHAVIOR
	Peak Isopleth	SEL _{max} Isopleth	RMS Isopleth
	5	525	736

SEA TURTLES

ISOPLETHS (meters)	PTS ON SET		BEHAVIOR
	Peak Isopleth	SEL _{max} Isopleth	RMS Isopleth
	0	30	24

MARINE MAMMALS

	LF Cetaceans	MF Cetaceans	HF Cetaceans	PWW/Imp/pep	OW/Phy/pep
PTS ONSET (Peak Isopleth, meters)	1	0	16	1	8
PTS ON SET (SEL _{max} Isopleth, meters)	924	34	1,145	596	38
ALL MAR					
Behavior (RMS Isopleth, meters)	736				

- Fits on one sheet (landscape)

- If other info/notes get cut off, please include elsewhere



**NOAA
FISHERIES**

The Report Tab summarizes the inputs and outputs provided in the Calculator Tab. The information in this Tab is designed to fit in a single sheet (landscape view). If other information or notes get cut-off from the what was provided in the Calculator Tab, please provide this information elsewhere.



**NOAA
FISHERIES**

Test Drive/Demo: Updated Tool



Examples:

A. Impact pile driving

- 36" steel pipe, 3 piles, 1000 strikes/pile, with bubble curtain

B. Vibratory pile driving

- 36" steel pipe, 3 piles, 30 minutes



NOAA
FISHERIES


Now, I will begin our second example: Vibratory pile driving (36" steel pipe pile, 3 piles per day, and time to drive a pile is 30 minutes)



NOAA
FISHERIES



Proxy Sound Level Tab: Vibratory



Let's demonstrate the Proxy Sound Level Tab for vibratory pile driving.
This Tab can be accessed using the toolbar found at the bottom of the Tool.



Proxy Sound Level Tab: Vibratory

1. Tab is sortable
2. Note: Pile size, Material, Water depth, & Comments
3. If exact pile size/material is not listed: Consult NMFS or use next largest size
4. Copy from Tab & then paste directly in Calculator Tab (paste as Value 123)

NOTE: Measurement Distance from Pile if not 10 m, then value will need to be updated in Calculator Tab

Note the various assumptions listed at the top of this Tab. This Tab is sortable by various pile features (size, material, etc.). Note complete row of information provided for each pile, including water depth, location, reference, and comments. Please pick the proxy that is most applicable to your activity. If the exact pile size or material is not listed, consult NMFS or use next largest size. Copy the information from this Tab and then paste directly in the corresponding Calculator Tab (paste as a Value, 123). Note: If measurement distance from pile is not 10 m, then this value will need to be updated in Calculator Tab. If you have specific information on sound levels for your pile size/material, then it is not necessary to rely on a proxy.

Proxy Sound Level Tab: Vibratory

To use this Tab, it makes sense to sort data by appropriate pile size and pile material

VIBRATORY PILE DRIVING PROXY SOUND LEVELS (UNATTENUATED)

How to Use Proxy Levels (NOTE: Data can be sorted)


- 1) When selecting the appropriate proxy levels, be sure to take into account the Pile size, Pile Material, Water depth (of installation), and the Comments column (if more information is needed, NMFS suggest con
- 2) If the exact pile material is not here, consult NMFS or use the next largest size pile of the same material for a conservative estimate.
- 3) In addition to RMS (average) levels, Peak sound levels are provided. **NOTE:** NMFS currently does NOT rely upon the Peak metric to evaluate vibratory pile driving.
- 4) To use surrogate level, Copy from this Table and then Paste in Calculator (ONLY paste as a Value (not a formula). **NOTE:** Pay attention to Column E (measurement distance from pile). If it is not 10 m, please
- 5) If there is the possibility of a pile using multiple piles of varying sizes, material, etc., use the specifications that result in the largest impacts (i.e., impact, largest size, steel pile)

Pile Size (inches)	Pile Material	Hammer Type	Water Depth	Measurement Distance from Pile*	Peak (dB)	RMS (dB)	Reference	Project/Location	Notes
12"	steel pipe	Vibratory	<5 m	10 m	165	150	Caltrans 2015	NA	Generic example
12"	steel pipe	Vibratory	<5 m	10 m	171	155	Caltrans 2015	NA	Generic example
38"	steel pipe (typical)	Vibratory	5 m	10 m	165	170	Caltrans 2015	NA	Generic example
34"	A2 steel sheet (typical)	Vibratory	15 m	10 m	175	160	Caltrans 2015	NA	Generic example
34"	A2 steel sheet								

IMPACT CALCULATOR | IMPACT REPORT | VIBRATORY PROXY SOUND LEVELS | VIBRATORY CALC

To use the Proxy Sound Level Tab, it makes sense to sort data by appropriate pile size (hot pink arrow) and pile material (turquoise arrow).

Proxy Sound Level Tab: Vibratory

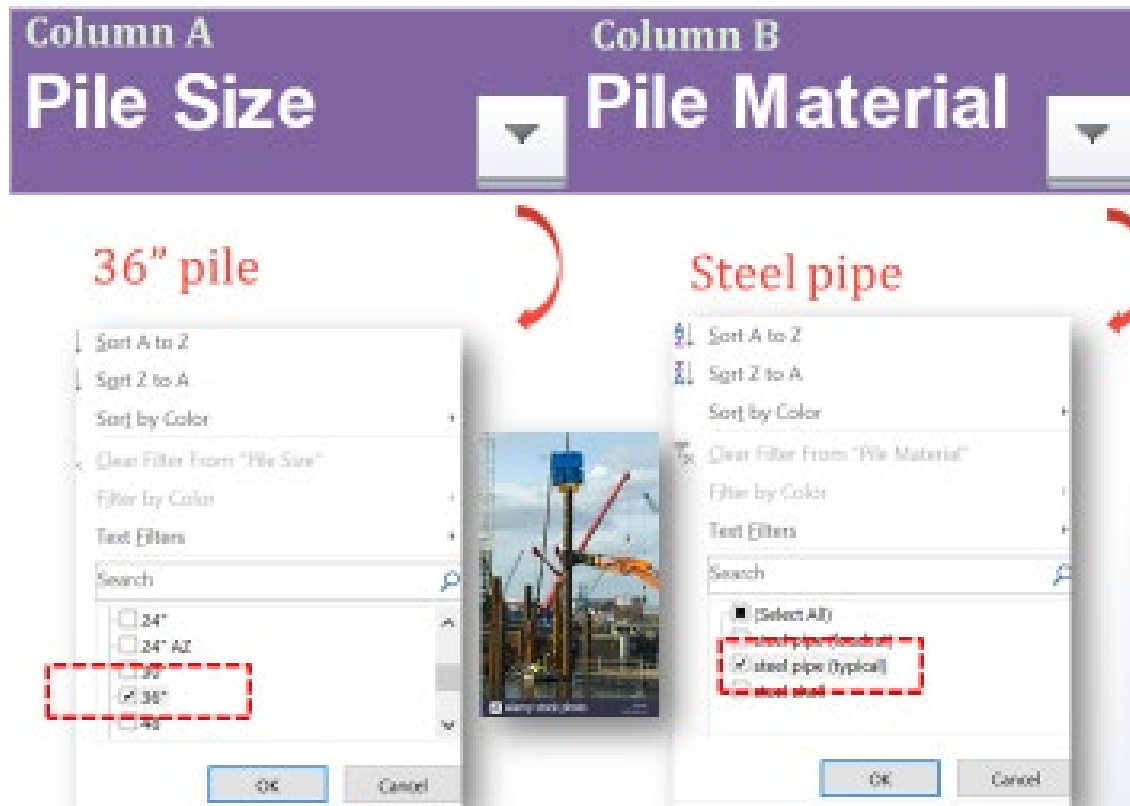

Here is a closer look at sorting columns, specifically Column A for pile size and Column B for pile material. In this example, we are interested in available data for 36" steel pipe piles. Since this is a more a generic assessment, we will choose steel pipe "typical" vs. "loudest."



Proxy Sound Level Tab: Impact Results of Sort



Pile Size	☒ Pile Material	☒ Hammer Type	Water Depth	Measurement Distance from Pile*	Peak	RMS	Reference
36"	steel pipe (typical)	Vibratory	5 m	10 m	180	170	Caltrans 2015


1. Red box indicates proxy sound levels for 36" steel pipe pile
2. Check water depth & other factors (location, notes)
3. For this example: There is only one value provided
4. Copy only RMS value for this row (Don't need Peak!)



Once data are sorted (by pile size and material), one potential choices for proxy levels is provided (see red box). Since this is the only choice, it used as the appropriate proxy level. Once chosen, copy values in only the RMS metric for this proxy (Peak is provided but not needed, which is why this column has gray text). Note: Pay attention to the measurement distance from the pile if it is anything other than 10 m.



Calculator Tab: Vibratory



NOAA
FISHERIES

Let's take a look at the Calculator Tab for vibratory pile driving. This Tab can be accessed using the toolbar found at the bottom of the Tool.



NOAA
FISHERIES

Calculator Tab: Vibratory

KEY

User Provided Information *Default values are in bold, italics turquoise (can be changed by user if project-specific information is available).*

Preset NMFS Provided Information (cannot be altered by user). NMFS thresholds/default weighting value are in bold red.

OUTPUT: Resultant Isopleth (cannot be altered by user)

Automatically Calculated Values Based on User Provided Information (only weighting adjustment (-dB) can be altered by user)



This slide illustrates the Key at the top of the Calculator Tab. Green cells are for user provided information. Note that default values are in bold italics turquoise font. These default values may be changed by the user if project-specific information is available. Yellow cells represent preset NMFS provided information and cannot be altered by the user. NMFS thresholds/default weighting values are in bold red. Bright blue cells represent outputs of the Tool or resultant isopleths based on user provided information and cannot be altered by the user. Finally, gray cells represent automatically calculated values based on user provided information (only weighting adjustment (-dB) values can be altered by the user and are found in the last row of the Tool). Please see Advanced Features later in this presentation for more information on adjusting these values.

Calculator Tab: Vibratory

STEP 1: GENERAL PROJECT INFORMATION

PROJECT TITLE and CONTACT	Example file		
PROJECT/SOURCE INFORMATION (row material, number, duration to drive pile, etc.)			Makes (please include all assumptions information)

Step 1

STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION


	METRIC	WEIGHTING (WPA in Hz)	
	RMS (NOT Peak)	Sea Turtle Default WPA (kHz)	Marine Mammal Default WPA (kHz)
Unattenuated Sound Pressure Level (dB) (see Proxy Level for surrogate values; Copy / PASTE Peak Values (100, not 10000))			
Attenuated Sound Pressure Level (dB) (see section 4 for a placeholder)	0	0.15	2.8
Distance associated with sound pressure level measurement (meters); Typically, 10-m but please double check JARIS calculations	10		
Transmission loss constant (meters recommends: 15 if unknown)	15		
Number of piles per day (post-estimate based on previous experience)		Attenuation (e.g., bubble curtain) (enter positive number)	0
Duration to drive a single pile (minutes) (post-estimate based on previous experience)			

Step 2

This slide illustrates the first two steps of the Vibratory Calculator Tab. Step 1 outlined in hot pink, where a user will enter qualitative project-specific information and Step 2 outlined in turquoise, where the user will enter quantitative project-specific information. We will go into more detail on both these steps in the next slides.

Calculator Tab: Vibratory

Step 1: General Project Information



STEP 1: GENERAL PROJECT INFORMATION			
PROJECT TITLE and CONTACT	Example title		
PROJECT/SOURCE INFORMATION (size, type, number; pile strikes, etc.)			Notes: (Please include all assumptions) other information

NOTE: Please include any assumptions, including if relying upon proxy sound levels.



Step 1 in the Calculator Tab is where the user provides general project information, such as project title and contact; source information such as pile size material, duration to drive a pile; and any other assumptions or notes, including if proxy levels were used or if any type of attenuation is assumed.



Calculator Tab: Vibratory

Step 2: Quantitative Project-Specific Information

STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION			
	METRIC		
1 sec SEL = RMS	RMS	WEIGHTING (WFA in kHz)	
Unattenuated Sound Pressure Level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)		Sea Turtle Default WFA (kHz)	Marine Mammal Default WFA (kHz)
Attenuated Sound Pressure Level (dB)* (calculation done automatically)	0	0.15	2.5
Distance associated with sound pressure level measurement (meters); Typically, 10-m but please double check data being used	10		
Transmission loss constant (NMF 5 recommends: 15 if unknown)	15		
Number of piles per day (best estimate based on previous experience)		Attenuation (e.g., bubble curtain) (enter positive number)	0
Duration to drive a single pile (minutes) (best estimate based on previous experience)			
Duration of Sound Production within a day (seconds)	0	Cumulative SEL at measured distance (dB)	#NUM!
10 Log (duration of sound production)	#NUM!		

NOTE: Default values already included in *italic turquoise* (can be changed)

Step 2 is where quantitative project-specific information is entered, such as levels, distance associated with level, transmission loss, number of piles per day, duration to drive a pile, and attenuation assumed. Default values (italics, turquoise) are provided for distance associated with level and transmission loss. Please confirm these defaults are applicable. If not, they may be modified. Gray cells represent automatically calculated values based on user provided information (and cannot be changed in Step 2). The next slides go into more detail on Step 2 inputs.

Calculator Tab: Vibratory

Step 2: Quantitative Project-Specific Information

	METRIC
1 sec SEL = RMS	RMS
A Unattenuated Sound Pressure Level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)	



In this cell insert proxy sound levels (**Paste as Value 123**) OR enter project-specific data

B Distance associated with sound pressure level measurement (meters); Typically, 10-m but please double check data being used	10
C Transmission loss constant (NMF's recommends: 15 if unknown)	15

This cell has a default value of 10 m. Make sure values in A are associated with 10 m

This cell has a default value of 15 (can be changed)



Let's take a closer look at some of the specific cells in Step 2 (labeled by row letter). Row A represents the unattenuated levels in the RMS metric. Here a user may enter project-specific level, if available or enter surrogate level from the Proxy Level Tab. If a value is copied from the Proxy Level Tab, paste it in Row A as a value (see red arrow). Row B represents the distance associated with the previously entered level. The default value is 10-m, but one should ensure this is correct. This value may be changed if the default is not correct. Row C represents transmission loss. The default value is 15 and is recommended if this value is unknown. If site-specific transmission loss is available, it may be used here instead of the default.



Calculator Tab: Vibratory

Step 2: Quantitative Project-Specific Information

D E	Number of piles per day (best estimate based on previous experience)		Attenuation (e.g., bubble curtain) (enter positive number)	0	F
	Duration to drive a single pile (minutes) (best estimate based on previous experience)				

This cell for the number of piles per day

This cell is for duration to drive a pile (minutes)

This cell is for attenuation (Note there is NO recommended default for vibratory pile driving. If no attenuation leave as zero.

Two additional rows are in Step 2. Cell D represents the number of piles per day based on best estimate from previous experience. Cell F represents attenuation, if being used. Please only enter positive numbers in this cell. If nothing is being used, please leave value as zero. Whatever attenuation is used will be reflected automatically in the attenuated levels (subtracted off levels entered on previous slide). Finally, Cell E represents the duration to drive a pile (minutes) based on best estimate from previous experience.

Calculator Tab: Impact

Step 2: Quantitative Project-Specific Information

Fully entered values

STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION			
	METRIC	WEIGHTING (WFA in kHz)	
1 sec SEL = RMS	RMS	Sea Turtle Default WFA (kHz)	Marine Mammal Default WFA (kHz)
Unattenuated Sound Pressure Level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)	170		
Attenuated Sound Pressure Level (dB)* (calculation done automatically)	170	0.16	2.5
Distance associated with sound pressure level measurement (meters); Typically, 10-m but please double check data being used	10		
Transmission loss constant (NMFS recommends: 15 if unknown)	15		
Number of piles per day (best estimate based on previous experience)	3	Attenuation (e.g., bubble curtain) (enter positive number)	0
Duration to drive a single pile (minutes) (best estimate based on previous experience)	30		
Duration of Sound Production within a day (seconds)	5400	Cumulative SEL at measured distance (dB)	207.32
10 Log (duration of sound production)	37.32		



This slide illustrates all the values entered in Step 2 for our specific example. Note in this example, there is no attenuation (0), so the unattenuated and attenuated RMS level is identical (170 dB).



Resultant Isopleths (by taxa)


[illegible]

After quantitative project-specific information is entered in Step 2 of the Calculator, resultant isopleths (bright blue cells) are produced by taxa.

Calculator Tab: Impact

Resultant Isopleths (by taxa)



FISHES		Distance (meters) to threshold	
		BEHAVIOR	
		RMS Threshold (dB)	
		150	
		215	
SEA TURTLES		Distance (meters) to threshold	
		PTS ONSET	BEHAVIOR
		PTS SEL _{cont} Threshold (dB)	RMS Threshold (dB)
		220	175
		1	5

This slide illustrates the Resultant Isopleths (bright blue cells) for fishes and sea turtles based on the various taxa-specific acoustic thresholds.

Calculator Tab: Impact

Resultant Isopleths (by taxa) cont'd



MARINE MAMMALS	Distance (meters) to threshold				
	PTS ONSET				
Hearing Group	LF Cetacean PTS SEL _{10m} Threshold (dB)	MF Cetacean PTS SEL _{10m} Threshold (dB)	HF Cetacean PTS SEL _{10m} Threshold (dB)	PW Pinniped PTS SEL _{10m} Threshold (dB)	OW Pinniped PTS SEL _{10m} Threshold (dB)
	133	138	172	181	179
	26	3	53	32	3
	BEHAVIOR				
	RMS Threshold (dB)				
	128				
ALL MARINE MAMMALS	21,503				




NOAA
FISHERIES

This slide illustrates the Resultant Isopleths (bright blue cells) for marine mammals based on the various hearing group-specific acoustic thresholds.



NOAA
FISHERIES

Report Tab: Vibratory



Let's demonstrate the Vibratory pile driving Report Tab. This Tab can be accessed using the toolbar found at the bottom of the Tool.



Report Tab: Vibratory

Summarizes user inputs and resulting isopleths



VIBRATORY PILE DRIVING REPORT PRINT IN LANDSCAPE TO CAPTURE ENTIRE SCREEN
(If OTHER INFO or NOTES get cut-off, please include information elsewhere)

Example title:

PROJECT INFORMATION

PROJECT INFORMATION		RMF
Attenuated sound pressure level (dBS)		170
Isopleth associated with sound pressure level (meters)		10
Transmission loss constant		75
Number of piles per day		3
Duration to drive pile (minutes)		30
Duration of sound production in day		1000
Cumulative SEL at measured distance		201

OTHER INFO:

NOTES:

Attenuation:

RESULTANT ISOPLETHS

FISHES

FISHES	
BEHAVIOR	
RMS Isopleth	
ISOPLETHS (meters)	205

SEA TURTLES

SEA TURTLES	
PTS ON SET	BEHAVIOR
SEL _{cont} Isopleth	RMS Isopleth
ISOPLETHS (meters)	5

MARINE MAMMALS

MARINE MAMMALS					
LF Cetaceans	MF Cetaceans	HF Cetaceans	PM Pinnipeds	CM Pinnipeds	
PTS ON SET (SEL _{cont} Isopleth, meters)	30	3	50	20	2
Behavior (RMS Isopleth, meters)	37548				

- Fits on one sheet (landscape)

- If other info/notes get cut off, please include elsewhere




**NOAA
FISHERIES**

The Report Tab summarizes the inputs and outputs provided in the Calculator Tab. The information in this Tab is designed to fit in a single sheet (landscape view). If other information or notes get cut-off from the what was provided in the Calculator Tab, please provide this information elsewhere.



**NOAA
FISHERIES**

Advanced Features: Weighting

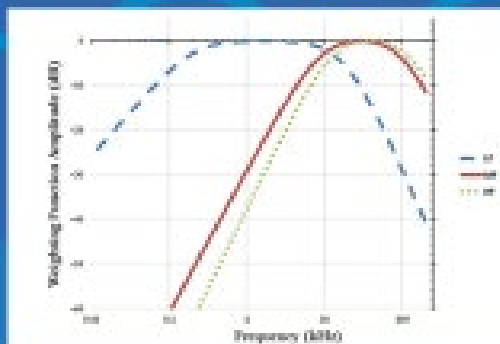

$$W(f) = C + 10 \log_{10} \left\{ \frac{(f/f_1)^{2a}}{[1 + (f/f_1)^2]^a [1 + (f/f_2)^2]^b} \right\}$$



NOAA
FISHERIES

The final slides cover an advanced feature, specifically incorporating weighting based on the pile driving spectrum, if available. This feature is optional.



NOAA
FISHERIES



Advanced Features: Weighting

Tool automatically provided default weighting for PTS threshold (SEL_{cum} metric) for **marine mammals & sea turtles** (none for **fishes**)

IMPACT

WEIGHTING	(WFA in kHz)
Sea Turtle Default WFA (kHz)	Marine Mammal Default WFA (kHz)
0.16	2

VIBRATORY

WEIGHTING	(WFA in kHz)
Sea Turtle Default WFA (kHz)	Marine Mammal Default WFA (kHz)
0.16	2.5

This Tool automatically provides default weighting for PTS thresholds in the SEL_{cum} metric for both marine mammals and sea turtles. Note auditory weighting functions are not available for fishes. These defaults are illustrated in the yellow boxes and bold red text on this slide and within the Tool on the Calculator Tabs. Note that they are different for marine mammals depending on whether the activity is impact or vibratory pile driving.

Advanced Features: Weighting

IMPACT

A	B	C	D	E	F	G
STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION						
	METRICS				WEIGHTING (WFA in kHz)	
	Peak	SEL _{eq}	RMS			
Unattenuated Single strike level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)				Effective Quiet (Fish Only)	Sea Turtle Default WFA (kHz)	Marine Mammal Default WFA (kHz)
Attenuated Single strike level (dB) (calculation done automatically)	0	0	0	150	0.16	2
Distance associated with single strike				WFA: Weighting Factor Adjustment		

VIBRATORY

STEP 2: QUANTITATIVE PROJECT-SPECIFIC INFORMATION			
	METRIC		
	RMS (NOT Peak)		WEIGHTING (WFA in kHz)
Unattenuated Sound Pressure Level (dB) (see Proxy Level Tab for surrogate values; Copy, ONLY Paste Values (123), not formulas)			Sea Turtle Default WFA (kHz)
Attenuated Sound Pressure Level (dB) (calculation done automatically)	0		Marine Mammal Default WFA (kHz)
Distance associated with sound			



This slide simply illustrates that the default weighting is provided in Step 2 of both the Impact (outlined in hot pink) and Vibratory (outlined in turquoise) Calculator tabs.



Advanced Features: Weighting

[illegible]NOAA
FISHERIES

If a spectrum is available for your particular pile size, material, and location. Default weighting may be adjusted at the bottom of the Calculator Tab, as illustrated by the turquoise box. For pile driving, it is particularly important to pay attention if the spectrum available is for an attenuated or an unattenuated pile and that the available spectrum matches your particular activity. Note, NMFS cautions using spectrum associated with bubble curtains, unless the exact same bubble curtain/settings is proposed for the specific project. The user should also note if a spectrum is being used and the associated details in Step 1.



Advanced Features: Weighting

However, if the spectrum is available for the pile material/size, then these data can be used to override default weighting via gray cells below:

WEIGHTING FUNCTION CALCULATIONS (Sea Turtles and Marine Mammals Only)						
Weighting Function Parameters	Low-Frequency Cetaceans	Mid-Frequency Cetaceans	High-Frequency Cetaceans	Phocid Pinnipeds	Otariid Pinnipeds	Sea Turtles
a	-1	1.5	1.5	1	2	1.4
b	2	2	2	2	2	2
f ₁	0.2	8.5	12	1.9	0.24	0.077
f ₂	19	113	140	30	25	0.44
c	0.12	1.2	1.38	0.75	0.84	2.35
Adjustment (-dB)	-0.01	-0.74	-0.87	-0.68	-1.15	-0.85

For specific instructions, see Instruction Manual for Optional User Spreadsheet tool (marine mammals), Section 3.2 (SPECTRUM (MULTIPLE FREQUENCIES) TO OVERRIDE WEIGHTING FACTOR ADJUSTMENT): <https://www.fisheries.noaa.gov/national/marine-mammal-protection/marine-mammal-acoustic-technical-guidance>

Spectrum data would be specifically entered in the gray cells, as illustrated by the red arrow. Inputs should always be negative numbers and are based on the difference between the unweighted SEL level and the marine mammal or sea turtle weighting function. For specific instructions on how to override default weighting, please see the Manual for the Optional User Spreadsheet Tool (marine mammals) found at the web site on this slide.

Thanks for Viewing!

Questions?

- **Technical or Suggestions to improve Tool or Introduction:**

- Amy Scholik-Schlomer
(amy.scholik@noaa.gov)

- **Project Specific:**

- HQ/Regional Analyst



NOAA
FISHERIES

Thanks for viewing this presentation. If you have technical questions or suggestions to improve this Tool, please feel free to contact the person listed on this slide or if you have project-specific questions, please contact your Headquarter or Regional analyst.



NOAA
FISHERIES